


MINI RECESSED PANEL

**3 CCT CHANGE
ROUND & SQUARE
4", 6"**




4"

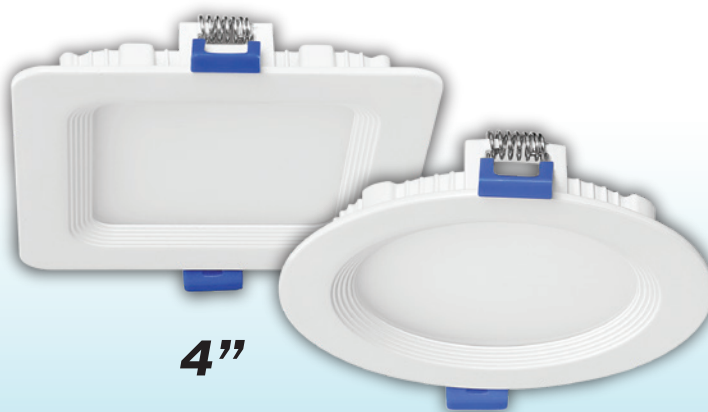

6"



3 CCT
SWITCH
ON DRIVER



SPECIFICATIONS

ELECTRICAL

		MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	FREQUENCY	EFFICACY (LPW)	LIFETIME
4"	RD	LR23734	LED/MINI4/PANEL/3CCT/RD/B	10	120	YES	50/60Hz	70	50,000
	SQ	LR23735	LED/MINI4/PANEL/3CCT/SQ/B	10	120	YES	50/60Hz	70	50,000
6"	RD	LR23736	LED/MINI6/PANEL/3CCT/RD/B	12	120	YES	50/60Hz	75	50,000
	SQ	LR23737	LED/MINI6/PANEL/3CCT/SQ/B	12	120	YES	50/60Hz	75	50,000

PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI
LR23734	3000K/4000K/5000K	SOFT/COOL/BRIGHT	650/700/700	110°	82
LR23735	3000K/4000K/5000K	SOFT/COOL/BRIGHT	650/700/700	110°	82
LR23736	3000K/4000K/5000K	SOFT/COOL/BRIGHT	850/900/950	110°	82
LR23737	3000K/4000K/5000K	SOFT/COOL/BRIGHT	850/900/950	110°	82

GENERAL

FINISH	DAMP LOCATION	COST/YR	ETL LISTED
WHITE	YES	\$ 1.20	YES
WHITE	YES	\$ 1.20	YES
WHITE	YES	\$ 1.45	YES
WHITE	YES	\$ 1.45	YES

DIMENSIONS

