

FEATURE

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- 2X8pcs ultra bright 2835 SMT LED lamp heads for emergency mode.
- Built-in 9.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Built-in 9.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation. (Remote capability up to 3W)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Five years warranty for the electrical parts and housing.
- Three years warranty for battery.

FAMILY : **LXA-JLEC2**

NOTES:

TYPE: **NEW COMPACT SIZE LED EMERGENCY COMBO**




ORDERING INFORMATION

FAMILY	LENS	FACEPLATE	HOUSING COLOR	REMOTE CAPACITY
JLEC2	R(RED)	BLANK(EXIT)	W(WHITE)	BLANK(WITHOUT)
	G(GREEN)	SA(SALIDA)	B(BLACK)	RC(WITH REMOTE)

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JLEC2RW	50x44x38.5cm/6pcs	12.6/11.6kgs
JLEC2GW	50x44x38.5cm/6pcs	12.6/11.6kgs
JLEC2RWRC	50x44x38.5cm/6pcs	13.0/12.0kgs
JLEC2GWRC	50x44x38.5cm/6pcs	13.0/12.0kgs

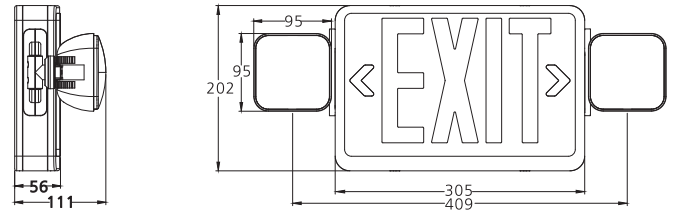

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JLEC2RW	120/277V	0.07/0.05A	4.2W	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins
JLEC2GW	120/277V	0.07/0.05A	4.2W	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins
JLEC2RWRC	120/277V	0.07/0.05A	4.2W	2x8pcs ultra bright 2835 SMT LED lamp+3W Remote Load	24 Hrs	90 Mins
JLEC2GWRC	120/277V	0.07/0.05A	4.2W	2x8pcs ultra bright 2835 SMT LED lamp +3W Remote Load	24 Hrs	90 Mins

NEW COMPACT SIZE LED EMERGENCY COMBO

LXA-JLEC2